

LINEARlight FLEX POWER 1200

LED modules for professional and industrial applications



Areas of application

- Architecture lighting
- Cove lighting
- Ceiling integration
- Wall integration

Product benefits

- Large selection of light colors
- Great design freedom thanks to flexibility and cuttability of module
- Simple mounting and connection
- Toolless connection with the optional CONNECTsystem
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- "Shop White" versions available for great color rendering without yellowing effect
- Extraordinary design and high quality materials
- Type of protection: IP00

Product features

- Flexible and cuttable LED strip
- Luminous flux: up to 1,200 lm/m
- Module efficacy: up to 152 lm/W
- Dimmable with PWM technology
- Fine White (3 SDCM)



Product family datasheet

Technical data

Electrical data

Product description	Nominal voltage	Type of current	Nominal wattage per meter	Rated wattage	Input voltage range	Reverse Voltage
LF1200 -G3-820-09 ¹⁾	24.0 V	DC	10.6 W	95.70 W	23...25 V	25 V
LF1200 -G3-824-09 ¹⁾	24.0 V	DC	10.6 W	95.70 W	23...25 V	25 V
LF1200 -G3-827-09 ¹⁾	24.0 V	DC	8.9 W	80.10 W	23...25 V	25 V
LF1200 -G3-830-09 ¹⁾	24.0 V	DC	8.9 W	80.10 W	23...25 V	25 V
LF1200 -G3-840-09 ¹⁾	24.0 V	DC	8.1 W	73.20 W	23...25 V	25 V
LF1200 -G3-850-09 ¹⁾	24.0 V	DC	8.1 W	73.20 W	23...25 V	25 V
LF1200 -G3-865-09 ¹⁾	24.0 V	DC	8.1 W	73.20 W	23...25 V	25 V
LF1200 -G3-927-09 ¹⁾	24.0 V	DC	10.6 W	95.70 W	23...25 V	25 V
LF1200 -G3-930-09 ¹⁾	24.0 V	DC	10.6 W	95.70 W	23...25 V	25 V
LF1200 -G3-940-09 ¹⁾	24.0 V	DC	10.0 W	89.60 W	23...25 V	25 V
LF1200 -G3-SW30-09 ¹⁾	24.0 V	DC	10.0 W	90.00 W	23...25 V	25 V
LF1200 -G3-SW40-09 ¹⁾	24.0 V	DC	10.0 W	90.00 W	23...25 V	25 V

¹⁾ See product remark

Photometrical data

Product description	Light color LED	Color temperature	Color rendering index Ra	Luminous flux per meter	Total useful luminous flux	Luminous efficacy
LF1200 -G3-820-09 ¹⁾	White	2000 K	>80	1000 lm	9000 lm	94 lm/W
LF1200 -G3-824-09 ¹⁾	White	2400 K	>80	1200 lm	10800 lm	113 lm/W
LF1200 -G3-827-09 ¹⁾	White	2700 K	>80	1200 lm	10800 lm	135 lm/W
LF1200 -G3-830-09 ¹⁾	White	3000 K	>80	1200 lm	10800 lm	135 lm/W
LF1200 -G3-840-09 ¹⁾	White	4000 K	>80	1200 lm	10800 lm	147 lm/W
LF1200 -G3-850-09 ¹⁾	White	5000 K	>80	1200 lm	10800 lm	147 lm/W
LF1200 -G3-865-09 ¹⁾	White	6500 K	>80	1200 lm	10800 lm	147 lm/W
LF1200 -G3-927-09 ¹⁾	White	2700 K	>90	1100 lm	9900 lm	103 lm/W
LF1200 -G3-930-09 ¹⁾	White	3000 K	>90	1200 lm	10800 lm	113 lm/W
LF1200 -G3-940-09 ¹⁾	White	4000 K	>90	1200 lm	10800 lm	120 lm/W
LF1200 -G3-SW30-09 ¹⁾	White	3000 K	>80	1200 lm	10800 lm	120 lm/W
LF1200 -G3-SW40-09 ¹⁾	White	4000 K	>80	1200 lm	10800 lm	120 lm/W

Product description	Light color (designation)
LF1200 -G3-820-09 ¹⁾	Warm Comfort Light
LF1200 -G3-824-09 ¹⁾	Warm Comfort Light
LF1200 -G3-827-09 ¹⁾	Warm White
LF1200 -G3-830-09 ¹⁾	White

Product family datasheet

Product description	Light color (designation)
LF1200 -G3-840-09 ¹⁾	Cool White
LF1200 -G3-850-09 ¹⁾	Daylight
LF1200 -G3-865-09 ¹⁾	Cool Daylight
LF1200 -G3-927-09 ¹⁾	Warm White
LF1200 -G3-930-09 ¹⁾	White
LF1200 -G3-940-09 ¹⁾	Cool White
LF1200 -G3-SW30-09 ¹⁾	Warm White
LF1200 -G3-SW40-09 ¹⁾	White

¹⁾ See product remark

Light technical data

Product description	LED pitch	Beam angle
LF1200 -G3-820-09 ¹⁾	14.3 mm	120 °
LF1200 -G3-824-09 ¹⁾	14.3 mm	120 °
LF1200 -G3-827-09 ¹⁾	14.3 mm	120 °
LF1200 -G3-830-09 ¹⁾	14.3 mm	120 °
LF1200 -G3-840-09 ¹⁾	14.3 mm	120 °
LF1200 -G3-850-09 ¹⁾	14.3 mm	120 °
LF1200 -G3-865-09 ¹⁾	14.3 mm	120 °
LF1200 -G3-927-09 ¹⁾	14.3 mm	120 °
LF1200 -G3-930-09 ¹⁾	14.3 mm	120 °
LF1200 -G3-940-09 ¹⁾	14.3 mm	120 °
LF1200 -G3-SW30-09 ¹⁾	14.3 mm	120 °
LF1200 -G3-SW40-09 ¹⁾	14.3 mm	120 °

¹⁾ See product remark

Product family datasheet

LED module information

Product description	Number of LEDs per meter	Number of LEDs per smallest unit
LF1200 -G3-820-09 ¹⁾	70	7
LF1200 -G3-824-09 ¹⁾	70	7
LF1200 -G3-827-09 ¹⁾	70	7
LF1200 -G3-830-09 ¹⁾	70	7
LF1200 -G3-840-09 ¹⁾	70	7
LF1200 -G3-850-09 ¹⁾	70	7
LF1200 -G3-865-09 ¹⁾	70	7
LF1200 -G3-927-09 ¹⁾	70	7
LF1200 -G3-930-09 ¹⁾	70	7
LF1200 -G3-940-09 ¹⁾	70	7
LF1200 -G3-SW30-09 ¹⁾	70	7
LF1200 -G3-SW40-09 ¹⁾	70	7

¹⁾ See product remark


Dimensions & weight

Product description	Length	Length – smallest unit	Width	Height	Product weight
LF1200 -G3-820-09 ¹⁾	9000 mm	100.0 mm	8.0 mm	1.4 mm	116.00 g
LF1200 -G3-824-09 ¹⁾	9000 mm	100.0 mm	8.0 mm	1.4 mm	116.00 g
LF1200 -G3-827-09 ¹⁾	9000 mm	100.0 mm	8.0 mm	1.4 mm	116.00 g
LF1200 -G3-830-09 ¹⁾	9000 mm	100.0 mm	8.0 mm	1.4 mm	116.00 g
LF1200 -G3-840-09 ¹⁾	9000 mm	100.0 mm	8.0 mm	1.4 mm	116.00 g
LF1200 -G3-850-09 ¹⁾	9000 mm	100.0 mm	8.0 mm	1.4 mm	116.00 g
LF1200 -G3-865-09 ¹⁾	9000 mm	100.0 mm	8.0 mm	1.4 mm	116.00 g
LF1200 -G3-927-09 ¹⁾	9000 mm	100.0 mm	8.0 mm	1.4 mm	116.00 g
LF1200 -G3-930-09 ¹⁾	9000 mm	100.0 mm	8.0 mm	1.4 mm	116.00 g
LF1200 -G3-940-09 ¹⁾	9000 mm	100.0 mm	8.0 mm	1.4 mm	116.00 g
LF1200 -G3-SW30-09 ¹⁾	9000 mm	100.0 mm	8.0 mm		116.00 g
LF1200 -G3-SW40-09 ¹⁾	9000 mm	100.0 mm	8.0 mm		116.00 g

¹⁾ See product remark

Product family datasheet

Product line drawing

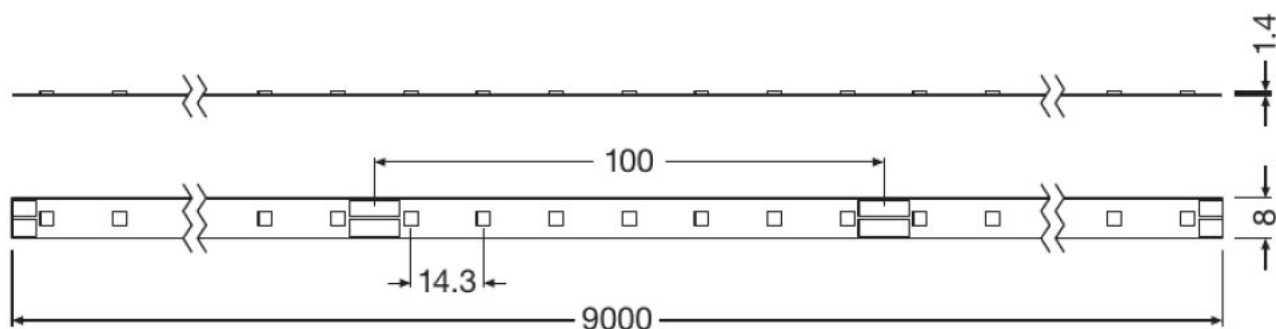

LF1200 -G3-820-09, LF1200 -G3-824-09, LF1200 -G3-827-09, LF1200 -G3-830-09, LF1200 -G3-840-09, LF1200 -G3-850-09, LF1200 -G3-865-09, LF1200 -G3-927-09, LF1200 -G3-930-09, LF1200 -G3-940-09, LF1200 -G3-SW30-09, LF1200 -G3-SW40-09

Temperatures & operating conditions

Product description	Performance temp. acc. to IEC 62717	Temperature range in operation at Tc point	Ambient temperature range
LF1200 -G3-820-09 ¹⁾	45 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾
LF1200 -G3-824-09 ¹⁾	45 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾
LF1200 -G3-827-09 ¹⁾	40 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾
LF1200 -G3-830-09 ¹⁾	40 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾
LF1200 -G3-840-09 ¹⁾	40 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾
LF1200 -G3-850-09 ¹⁾	40 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾
LF1200 -G3-865-09 ¹⁾	40 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾
LF1200 -G3-927-09 ¹⁾	45 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾
LF1200 -G3-930-09 ¹⁾	45 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾
LF1200 -G3-940-09 ¹⁾	40 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾
LF1200 -G3-SW30-09 ¹⁾	40 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾
LF1200 -G3-SW40-09 ¹⁾	40 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾

¹⁾ See product remark

²⁾ Exceeding the maximum ratings will reduce expected life time or destroy the LED strip.

³⁾ Rated ambient temp. 25°C/Providing that temperature at Tc point is below max value during operation/Temperature ramping for environmental testing acc. to IEC 62717, 1K/min

Product family datasheet

Lifespan

Product description	Rated lamp life time	Nominal lamp life time
LF1200 -G3-820-09 ¹⁾	60000 h ²⁾	60000 h
LF1200 -G3-824-09 ¹⁾	60000 h ²⁾	60000 h
LF1200 -G3-827-09 ¹⁾	60000 h ²⁾	60000 h
LF1200 -G3-830-09 ¹⁾	60000 h ²⁾	60000 h
LF1200 -G3-840-09 ¹⁾	60000 h ²⁾	60000 h
LF1200 -G3-850-09 ¹⁾	60000 h ²⁾	60000 h
LF1200 -G3-865-09 ¹⁾	60000 h ²⁾	60000 h
LF1200 -G3-927-09 ¹⁾	60000 h ²⁾	60000 h
LF1200 -G3-930-09 ¹⁾	60000 h ²⁾	60000 h
LF1200 -G3-940-09 ¹⁾	60000 h ²⁾	60000 h
LF1200 -G3-SW30-09 ¹⁾	60000 h ²⁾	60000 h
LF1200 -G3-SW40-09 ¹⁾	60000 h ²⁾	60000 h

¹⁾ See product remark

²⁾ L70/B50 at T_c 40 °C

Capabilities

Product description	Dimmable	Lowest bending radius	Self-adhesive
LF1200 -G3-820-09 ¹⁾	Yes	20 mm	Yes
LF1200 -G3-824-09 ¹⁾	Yes	20 mm	Yes
LF1200 -G3-827-09 ¹⁾	Yes	20 mm	Yes
LF1200 -G3-830-09 ¹⁾	Yes	20 mm	Yes
LF1200 -G3-840-09 ¹⁾	Yes	20 mm	Yes
LF1200 -G3-850-09 ¹⁾	Yes	20 mm	Yes
LF1200 -G3-865-09 ¹⁾	Yes	20 mm	Yes
LF1200 -G3-927-09 ¹⁾	Yes	20 mm	Yes
LF1200 -G3-930-09 ¹⁾	Yes	20 mm	Yes
LF1200 -G3-940-09 ¹⁾	Yes	20 mm	Yes
LF1200 -G3-SW30-09 ¹⁾	Yes	20 mm	Yes
LF1200 -G3-SW40-09 ¹⁾	Yes	20 mm	Yes

Product description	With connection set	With end piece
LF1200 -G3-820-09 ¹⁾	Yes	No
LF1200 -G3-824-09 ¹⁾	Yes	No
LF1200 -G3-827-09 ¹⁾	Yes	No
LF1200 -G3-830-09 ¹⁾	Yes	No
LF1200 -G3-840-09 ¹⁾	Yes	No
LF1200 -G3-850-09 ¹⁾	Yes	No
LF1200 -G3-865-09 ¹⁾	Yes	No
LF1200 -G3-927-09 ¹⁾	Yes	No
LF1200 -G3-930-09 ¹⁾	Yes	No
LF1200 -G3-940-09 ¹⁾	Yes	No

Product family datasheet

Product description	With connection set	With end piece
LF1200 -G3-SW30-09 ¹⁾	Yes	No
LF1200 -G3-SW40-09 ¹⁾	Yes	No

¹⁾ See product remark

Certificates & standards

Product description	Energy efficiency class	Energy consumption	Standards
LF1200 -G3-820-09 ¹⁾	A+ ²⁾	105 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF1200 -G3-824-09 ¹⁾	A+ ²⁾	105 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF1200 -G3-827-09 ¹⁾	A++ ²⁾	88 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF1200 -G3-830-09 ¹⁾	A++ ²⁾	88 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF1200 -G3-840-09 ¹⁾	A++ ²⁾	81 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF1200 -G3-850-09 ¹⁾	A++ ²⁾	81 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF1200 -G3-865-09 ¹⁾	A++ ²⁾	81 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF1200 -G3-927-09 ¹⁾	A+ ²⁾	105 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF1200 -G3-930-09 ¹⁾	A+ ²⁾	105 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF1200 -G3-940-09 ¹⁾	A+ ²⁾	99 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF1200 -G3-SW30-09 ¹⁾	A+ ²⁾	99 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF1200 -G3-SW40-09 ¹⁾	A+ ²⁾	99 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750

Product description	Type of protection
LF1200 -G3-820-09 ¹⁾	IP00
LF1200 -G3-824-09 ¹⁾	IP00
LF1200 -G3-827-09 ¹⁾	IP00
LF1200 -G3-830-09 ¹⁾	IP00
LF1200 -G3-840-09 ¹⁾	IP00
LF1200 -G3-850-09 ¹⁾	IP00
LF1200 -G3-865-09 ¹⁾	IP00
LF1200 -G3-927-09 ¹⁾	IP00
LF1200 -G3-930-09 ¹⁾	IP00
LF1200 -G3-940-09 ¹⁾	IP00
LF1200 -G3-SW30-09 ¹⁾	IP00
LF1200 -G3-SW40-09 ¹⁾	IP00

Product family datasheet

¹⁾ See product remark

²⁾ Applicable on smallest operable unit

Logistical data

Product description	Temperature range at storage
LF1200 -G3-820-09 ¹⁾	-40...80 °C
LF1200 -G3-824-09 ¹⁾	-40...80 °C
LF1200 -G3-827-09 ¹⁾	-40...80 °C
LF1200 -G3-830-09 ¹⁾	-40...80 °C
LF1200 -G3-840-09 ¹⁾	-40...80 °C
LF1200 -G3-850-09 ¹⁾	-40...80 °C
LF1200 -G3-865-09 ¹⁾	-40...80 °C
LF1200 -G3-927-09 ¹⁾	-40...80 °C
LF1200 -G3-930-09 ¹⁾	-40...80 °C
LF1200 -G3-940-09 ¹⁾	-40...80 °C
LF1200 -G3-SW30-09 ¹⁾	-40...80 °C
LF1200 -G3-SW40-09 ¹⁾	-40...80 °C

¹⁾ See product remark

Product remark

Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

Equipment / Accessories

- Simplified connection with optional matching CONNECTsystem
- Quick installation with optional SLIM TRACK System
- Perfectly matched to OPTOTRONIC 24 V electronic control gears

Application advice


For more detailed application information and graphics please see product datasheet.

Sales and Technical Support













Sales and Technical Support www.osram.com

Product family datasheet

Download Data

File	
	User instruction LINEARlight FLEX POWER
	Product Datasheet LINEARlight FLEX POWER Specification Sheet (EN)
	Brochures Light is freedom of design (EN)
	Certificates EAC Certificate
	Certificates UL Certificate
	Certificates ENEC10_VDE Certificate
	Certificates VDE_ENEC+ Certificate
	Certificates CB TEST CERTIFICATE DE1-57844
	Declarations of conformity EU Declaration of conformity
	Declarations of conformity Manufacturer declaration
	Eulumdat 727118_LF1200-G3-820-09_LDT
	IES data 727125_LF1200-G3-820-09_IES
	Eulumdat 727120_LF1200-G3-824-09_LDT
	IES data 727119_LF1200-G3-824-09_IES
	Eulumdat 727122_LF1200-G3-827-09_LDT
	IES data 727121_LF1200-G3-827-09_IES
	Eulumdat 727124_LF1200-G3-830-09_ldt
	IES data 727123_LF1200-G3-830-09_IES
	Eulumdat 727127_LF1200-G3-840-09_LDT
	IES data 727126_LF1200-G3-840-09_IES
	Eulumdat 727129_LF1200-G3-850-09_LDT
	IES data 727128_LF1200-G3-850-09_IES

Product family datasheet

	Eulumdat 727131_LF1200-G3-865-09_LDT
	IES data 727130_LF1200-G3-865-09_IES
	Eulumdat 727153_LF1200-G3-927-09_LDT
	IES data 727132_LF1200-G3-927-09_IES
	Eulumdat 727155_LF1200-G3-930-09_LDT
	IES data 727154_LF1200-G3-930-09_IES
	Eulumdat 727157_LF1200-G3-940-09_LDT
	IES data 727156_LF1200-G3-940-09_IES
	Eulumdat 727159_LF1200-G3-SW30-09_LDT
	IES data 727158_LF1200-G3-SW30-09_IES
	Eulumdat 727161_LF1200-G3-SW40-09_LDT
	IES data 727160_LF1200-G3-SW40-09_IES

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899953055	LF1200 -G3-820-09	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1861.00 g
4052899953062	LF1200 -G3-824-09	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1861.00 g
4052899953079	LF1200 -G3-827-09	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1861.00 g
4052899953086	LF1200 -G3-830-09	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1861.00 g
4052899953093	LF1200 -G3-840-09	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1861.00 g
4052899953291	LF1200 -G3-850-09	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1861.00 g
4052899953314	LF1200 -G3-865-09	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1861.00 g
4052899953321	LF1200 -G3-927-09	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1861.00 g

Product family datasheet

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899953338	LF1200 -G3-930-09	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1861.00 g
4052899953345	LF1200 -G3-940-09	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1861.00 g
4052899964044	LF1200 -G3-SW30-09	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1861.00 g
4052899964051	LF1200 -G3-SW40-09	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1861.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Accessories Optional

Product description	Accessory name	Accessory code
LF1200 -G3-820-09	FX -SC08-G2-CT2PF-0500	▶ 4052899464735
LF1200 -G3-820-09	FX -SC08-G2-CT2PF-1000	▶ 4052899464766
LF1200 -G3-820-09	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF1200 -G3-824-09	FX -SC08-G2-CT2PF-0500	▶ 4052899464735
LF1200 -G3-824-09	FX -SC08-G2-CT2PF-1000	▶ 4052899464766
LF1200 -G3-824-09	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF1200 -G3-827-09	FX -SC08-G2-CT2PF-0500	▶ 4052899464735
LF1200 -G3-827-09	FX -SC08-G2-CT2PF-1000	▶ 4052899464766
LF1200 -G3-827-09	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF1200 -G3-830-09	FX -SC08-G2-CT2PF-0500	▶ 4052899464735
LF1200 -G3-830-09	FX -SC08-G2-CT2PF-1000	▶ 4052899464766
LF1200 -G3-830-09	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF1200 -G3-840-09	FX -SC08-G2-CT2PF-0500	▶ 4052899464735
LF1200 -G3-840-09	FX -SC08-G2-CT2PF-1000	▶ 4052899464766
LF1200 -G3-840-09	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF1200 -G3-850-09	FX -SC08-G2-CT2PF-0500	▶ 4052899464735
LF1200 -G3-850-09	FX -SC08-G2-CT2PF-1000	▶ 4052899464766
LF1200 -G3-850-09	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF1200 -G3-865-09	FX -SC08-G2-CT2PF-0500	▶ 4052899464735
LF1200 -G3-865-09	FX -SC08-G2-CT2PF-1000	▶ 4052899464766
LF1200 -G3-865-09	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF1200 -G3-927-09	FX -SC08-G2-CT2PF-0500	▶ 4052899464735
LF1200 -G3-927-09	FX -SC08-G2-CT2PF-1000	▶ 4052899464766
LF1200 -G3-927-09	FX -SC08-G2-CT4PJ	▶ 4052899464858

Product family datasheet

LF1200 -G3-930-09	FX -SC08-G2-CT2PF-0500	4052899464735
LF1200 -G3-930-09	FX -SC08-G2-CT2PF-1000	▶ 4052899464766
LF1200 -G3-930-09	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF1200 -G3-940-09	FX -SC08-G2-CT2PF-0500	▶ 4052899464735
LF1200 -G3-940-09	FX -SC08-G2-CT2PF-1000	▶ 4052899464766
LF1200 -G3-940-09	FX -SC08-G2-CT4PJ	▶ 4052899464858

References / Links

System configurator tool is available online at <https://flex.osram.info/en/flex-configurator>

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.