

LINEARlight FLEX POWER 2000

LED modules for professional and industrial applications



Areas of application

- Architecture lighting
- Cove lighting
- Ceiling integration

Product benefits

- Large selection of light colors
- Great design freedom thanks to flexibility and cuttability of module
- Simple mounting and connection
- Toolless connection with the optional CONNECTsystem
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- "Shop White" versions available for great color rendering without yellowing effect
- Extraordinary design and high quality materials
- Type of protection: IP00

Product features

- Flexible and cuttable LED strip
- Luminous flux: up to 2,000 lm/m
- Module efficacy: up to 147 lm/W
- Dimmable with PWM technology
- Fine White (3 SDCM)



Product family datasheet

Technical data

Electrical data

Product description	Nominal voltage	Type of current	Nominal wattage per meter	Rated wattage	Input voltage range	Reverse Voltage
LF2000 -G3-820-04 ¹⁾	24.0 V	DC	17.9 W	80.50 W	23...25 V	25 V
LF2000 -G3-824-04 ¹⁾	24.0 V	DC	17.9 W	80.50 W	23...25 V	25 V
LF2000 -G3-827-04 ¹⁾	24.0 V	DC	15.0 W	67.30 W	23...25 V	25 V
LF2000 -G3-830-04 ¹⁾	24.0 V	DC	15.0 W	67.30 W	23...25 V	25 V
LF2000 -G3-840-04 ¹⁾	24.0 V	DC	13.6 W	61.30 W	23...25 V	25 V
LF2000 -G3-850-04 ¹⁾	24.0 V	DC	13.6 W	61.30 W	23...25 V	25 V
LF2000 -G3-865-04 ¹⁾	24.0 V	DC	13.6 W	61.30 W	23...25 V	25 V
LF2000 -G3-927-04 ¹⁾	24.0 V	DC	17.9 W	80.50 W	23...25 V	25 V
LF2000 -G3-930-04 ¹⁾	24.0 V	DC	17.9 W	80.50 W	23...25 V	25 V
LF2000 -G3-940-04 ¹⁾	24.0 V	DC	16.3 W	73.40 W	23...25 V	25 V
LF2000 -G3-SW30-04 ¹⁾	24.0 V	DC	17.9 W	80.60 W	23...25 V	25 V
LF2000 -G3-SW40-04 ¹⁾	24.0 V	DC	17.9 W	80.60 W	23...25 V	25 V

¹⁾ See product remark

Photometrical data

Product description	Light color LED	Color temperature	Color rendering index Ra	Luminous flux per meter	Total useful luminous flux	Luminous efficacy
LF2000 -G3-820-04 ¹⁾	White	2000 K	>80	1650 lm	7425 lm	92 lm/W
LF2000 -G3-824-04 ¹⁾	White	2400 K	>80	2000 lm	9000 lm	112 lm/W
LF2000 -G3-827-04 ¹⁾	White	2700 K	>80	2000 lm	9000 lm	134 lm/W
LF2000 -G3-830-04 ¹⁾	White	3000 K	>80	2000 lm	9000 lm	134 lm/W
LF2000 -G3-840-04 ¹⁾	White	4000 K	>80	2000 lm	9000 lm	147 lm/W
LF2000 -G3-850-04 ¹⁾	White	5000 K	>80	2000 lm	9000 lm	147 lm/W
LF2000 -G3-865-04 ¹⁾	White	6500 K	>80	2000 lm	9000 lm	147 lm/W
LF2000 -G3-927-04 ¹⁾	White	2700 K	>90	1800 lm	8100 lm	101 lm/W
LF2000 -G3-930-04 ¹⁾	White	3000 K	>90	2000 lm	9000 lm	112 lm/W
LF2000 -G3-940-04 ¹⁾	White	4000 K	>90	2000 lm	9000 lm	123 lm/W
LF2000 -G3-SW30-04 ¹⁾	White	3000 K	>80	2000 lm	9000 lm	112 lm/W
LF2000 -G3-SW40-04 ¹⁾	White	4000 K	>80	2000 lm	9000 lm	112 lm/W

Product description	Light color (designation)
LF2000 -G3-820-04 ¹⁾	Warm Comfort Light
LF2000 -G3-824-04 ¹⁾	Warm Comfort Light
LF2000 -G3-827-04 ¹⁾	Warm White
LF2000 -G3-830-04 ¹⁾	White

Product family datasheet

Product description	Light color (designation)
LF2000 -G3-840-04 ¹⁾	Cool White
LF2000 -G3-850-04 ¹⁾	Daylight
LF2000 -G3-865-04 ¹⁾	Cool Daylight
LF2000 -G3-927-04 ¹⁾	Warm White
LF2000 -G3-930-04 ¹⁾	White
LF2000 -G3-940-04 ¹⁾	Cool White
LF2000 -G3-SW30-04 ¹⁾	Warm White
LF2000 -G3-SW40-04 ¹⁾	White

¹⁾ See product remark

Light technical data

Product description	LED pitch	Beam angle
LF2000 -G3-820-04 ¹⁾	14.3 mm	120 °
LF2000 -G3-824-04 ¹⁾	14.3 mm	120 °
LF2000 -G3-827-04 ¹⁾	14.3 mm	120 °
LF2000 -G3-830-04 ¹⁾	14.3 mm	120 °
LF2000 -G3-840-04 ¹⁾	14.3 mm	120 °
LF2000 -G3-850-04 ¹⁾	14.3 mm	120 °
LF2000 -G3-865-04 ¹⁾	14.3 mm	120 °
LF2000 -G3-927-04 ¹⁾	14.3 mm	120 °
LF2000 -G3-930-04 ¹⁾	14.3 mm	120 °
LF2000 -G3-940-04 ¹⁾	14.3 mm	120 °
LF2000 -G3-SW30-04 ¹⁾	14.3 mm	120 °
LF2000 -G3-SW40-04 ¹⁾	14.3 mm	120 °

¹⁾ See product remark

Product family datasheet

LED module information

Product description	Number of LEDs per meter	Number of LEDs per smallest unit
LF2000 -G3-820-04 ¹⁾	70	7
LF2000 -G3-824-04 ¹⁾	70	7
LF2000 -G3-827-04 ¹⁾	70	7
LF2000 -G3-830-04 ¹⁾	70	7
LF2000 -G3-840-04 ¹⁾	70	7
LF2000 -G3-850-04 ¹⁾	70	7
LF2000 -G3-865-04 ¹⁾	70	7
LF2000 -G3-927-04 ¹⁾	70	7
LF2000 -G3-930-04 ¹⁾	70	7
LF2000 -G3-940-04 ¹⁾	70	7
LF2000 -G3-SW30-04 ¹⁾	70	7
LF2000 -G3-SW40-04 ¹⁾	70	7

¹⁾ See product remark


Dimensions & weight

Product description	Length	Length – smallest unit	Width	Height	Product weight
LF2000 -G3-820-04 ¹⁾	4500 mm	100.0 mm	8.0 mm	1.4 mm	58.00 g
LF2000 -G3-824-04 ¹⁾	4500 mm	100.0 mm	8.0 mm	1.4 mm	58.00 g
LF2000 -G3-827-04 ¹⁾	4500 mm	100.0 mm	8.0 mm	1.4 mm	58.00 g
LF2000 -G3-830-04 ¹⁾	4500 mm	100.0 mm	8.0 mm	1.4 mm	58.00 g
LF2000 -G3-840-04 ¹⁾	4500 mm	100.0 mm	8.0 mm	1.4 mm	58.00 g
LF2000 -G3-850-04 ¹⁾	4500 mm	100.0 mm	8.0 mm	1.4 mm	58.00 g
LF2000 -G3-865-04 ¹⁾	4500 mm	100.0 mm	8.0 mm	1.4 mm	58.00 g
LF2000 -G3-927-04 ¹⁾	4500 mm	100.0 mm	8.0 mm	1.4 mm	58.00 g
LF2000 -G3-930-04 ¹⁾	4500 mm	100.0 mm	8.0 mm	1.4 mm	58.00 g
LF2000 -G3-940-04 ¹⁾	4500 mm	100.0 mm	8.0 mm	1.4 mm	58.00 g
LF2000 -G3-SW30-04 ¹⁾	4500 mm	100.0 mm	8.0 mm		58.00 g
LF2000 -G3-SW40-04 ¹⁾	4500 mm	100.0 mm	8.0 mm		58.00 g

¹⁾ See product remark

Product family datasheet

Product line drawing

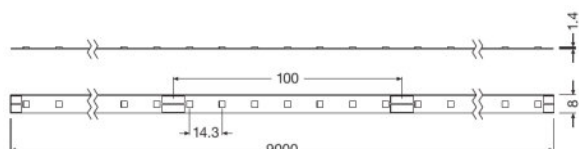

LF2000 -G3-820-04, LF2000 -G3-824-04, LF2000 -G3-827-04, LF2000 -G3-830-04, LF2000 -G3-840-04, LF2000 -G3-850-04, LF2000 -G3-865-04, LF2000 -G3-927-04, LF2000 -G3-930-04, LF2000 -G3-940-04, LF2000 -G3-SW30-04, LF2000 -G3-SW40-04

Temperatures & operating conditions

Product description	Performance temp. acc. to IEC 62717	Temperature range in operation at Tc point	Ambient temperature range
LF2000 -G3-820-04 ¹⁾	50 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾
LF2000 -G3-824-04 ¹⁾	50 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾
LF2000 -G3-827-04 ¹⁾	45 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾
LF2000 -G3-830-04 ¹⁾	45 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾
LF2000 -G3-840-04 ¹⁾	45 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾
LF2000 -G3-850-04 ¹⁾	45 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾
LF2000 -G3-865-04 ¹⁾	45 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾
LF2000 -G3-927-04 ¹⁾	50 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾
LF2000 -G3-930-04 ¹⁾	50 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾
LF2000 -G3-940-04 ¹⁾	45 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾
LF2000 -G3-SW30-04 ¹⁾	55 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾
LF2000 -G3-SW40-04 ¹⁾	55 °C	-20...90 °C ²⁾	-20...+50 °C ³⁾

¹⁾ See product remark

Product family datasheet

²⁾ Exceeding the maximum ratings will reduce expected life time or destroy the LED strip.

³⁾ Rated ambient temp. 25°C/Providing that temperature at Tc point is below max value during operation/Temperature ramping for environmental testing acc. to IEC 62717, 1K/min

Lifespan

Product description	Rated lamp life time	Nominal lamp life time
LF2000 -G3-820-04 ¹⁾	60000 h ²⁾	60000 h
LF2000 -G3-824-04 ¹⁾	60000 h ²⁾	60000 h
LF2000 -G3-827-04 ¹⁾	60000 h ²⁾	60000 h
LF2000 -G3-830-04 ¹⁾	60000 h ²⁾	60000 h
LF2000 -G3-840-04 ¹⁾	60000 h ²⁾	60000 h
LF2000 -G3-850-04 ¹⁾	60000 h ²⁾	60000 h
LF2000 -G3-865-04 ¹⁾	60000 h ²⁾	60000 h
LF2000 -G3-927-04 ¹⁾	60000 h ²⁾	60000 h
LF2000 -G3-930-04 ¹⁾	60000 h ²⁾	60000 h
LF2000 -G3-940-04 ¹⁾	60000 h ²⁾	60000 h
LF2000 -G3-SW30-04 ¹⁾	60000 h ²⁾	60000 h
LF2000 -G3-SW40-04 ¹⁾	60000 h ²⁾	60000 h

¹⁾ See product remark

²⁾ L70/B50 at T_c 40 °C

Capabilities

Product description	Dimmable	Lowest bending radius	Self-adhesive
LF2000 -G3-820-04 ¹⁾	Yes	20 mm	Yes
LF2000 -G3-824-04 ¹⁾	Yes	20 mm	Yes
LF2000 -G3-827-04 ¹⁾	Yes	20 mm	Yes
LF2000 -G3-830-04 ¹⁾	Yes	20 mm	Yes
LF2000 -G3-840-04 ¹⁾	Yes	20 mm	Yes
LF2000 -G3-850-04 ¹⁾	Yes	20 mm	Yes
LF2000 -G3-865-04 ¹⁾	Yes	20 mm	Yes
LF2000 -G3-927-04 ¹⁾	Yes	20 mm	Yes
LF2000 -G3-930-04 ¹⁾	Yes	20 mm	Yes
LF2000 -G3-940-04 ¹⁾	Yes	20 mm	Yes
LF2000 -G3-SW30-04 ¹⁾	Yes	20 mm	Yes
LF2000 -G3-SW40-04 ¹⁾	Yes	20 mm	Yes

Product description	With connection set	With end piece
LF2000 -G3-820-04 ¹⁾	Yes	No
LF2000 -G3-824-04 ¹⁾	Yes	No
LF2000 -G3-827-04 ¹⁾	Yes	No
LF2000 -G3-830-04 ¹⁾	Yes	No
LF2000 -G3-840-04 ¹⁾	Yes	No
LF2000 -G3-850-04 ¹⁾	Yes	No
LF2000 -G3-865-04 ¹⁾	Yes	No

Product family datasheet

Product description	With connection set	With end piece
LF2000 -G3-927-04 ¹⁾	Yes	No
LF2000 -G3-930-04 ¹⁾	Yes	No
LF2000 -G3-940-04 ¹⁾	Yes	No
LF2000 -G3-SW30-04 ¹⁾	Yes	No
LF2000 -G3-SW40-04 ¹⁾	Yes	No

¹⁾ See product remark

Certificates & standards

Product description	Energy efficiency class	Energy consumption	Standards
LF2000 -G3-820-04 ¹⁾	A+ ²⁾	89 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF2000 -G3-824-04 ¹⁾	A+ ²⁾	89 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF2000 -G3-827-04 ¹⁾	A++ ²⁾	74 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF2000 -G3-830-04 ¹⁾	A++ ²⁾	74 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF2000 -G3-840-04 ¹⁾	A++ ²⁾	67 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF2000 -G3-850-04 ¹⁾	A++ ²⁾	67 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF2000 -G3-865-04 ¹⁾	A++ ²⁾	67 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF2000 -G3-927-04 ¹⁾	A+ ²⁾	89 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF2000 -G3-930-04 ¹⁾	A+ ²⁾	89 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF2000 -G3-940-04 ¹⁾	A+ ²⁾	81 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF2000 -G3-SW30-04 ¹⁾	A+ ²⁾	89 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750
LF2000 -G3-SW40-04 ¹⁾	A+ ²⁾	89 kWh/1000h	CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750

Product description	Type of protection
LF2000 -G3-820-04 ¹⁾	IP00
LF2000 -G3-824-04 ¹⁾	IP00
LF2000 -G3-827-04 ¹⁾	IP00
LF2000 -G3-830-04 ¹⁾	IP00
LF2000 -G3-840-04 ¹⁾	IP00
LF2000 -G3-850-04 ¹⁾	IP00
LF2000 -G3-865-04 ¹⁾	IP00
LF2000 -G3-927-04 ¹⁾	IP00
LF2000 -G3-930-04 ¹⁾	IP00

Product family datasheet

Product description	Type of protection
LF2000 -G3-940-04 ¹⁾	IP00
LF2000 -G3-SW30-04 ¹⁾	IP00
LF2000 -G3-SW40-04 ¹⁾	IP00

¹⁾ See product remark

²⁾ Applicable on smallest operable unit

Logistical data

Product description	Temperature range at storage
LF2000 -G3-820-04 ¹⁾	-40...80 °C
LF2000 -G3-824-04 ¹⁾	-40...80 °C
LF2000 -G3-827-04 ¹⁾	-40...80 °C
LF2000 -G3-830-04 ¹⁾	-40...80 °C
LF2000 -G3-840-04 ¹⁾	-40...80 °C
LF2000 -G3-850-04 ¹⁾	-40...80 °C
LF2000 -G3-865-04 ¹⁾	-40...80 °C
LF2000 -G3-927-04 ¹⁾	-40...80 °C
LF2000 -G3-930-04 ¹⁾	-40...80 °C
LF2000 -G3-940-04 ¹⁾	-40...80 °C
LF2000 -G3-SW30-04 ¹⁾	-40...80 °C
LF2000 -G3-SW40-04 ¹⁾	-40...80 °C

¹⁾ See product remark

Product remark

Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see www.osram.com/led-systems/All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

Equipment / Accessories

- Simplified connection with optional matching CONNECTsystem
- Quick installation with optional SLIM TRACK System
- Perfectly matched to OPTOTRONIC 24 V electronic control gears

Application advice












For more detailed application information and graphics please see product datasheet.

Product family datasheet




Sales and Technical Support

Sales and Technical Support www.osram.com

Download Data

File	
	User instruction LINEARlight FLEX POWER
	Product Datasheet LINEARlight FLEX POWER Specification Sheet (EN)
	Brochures Light is freedom of design (EN)
	Certificates EAC Certificate
	Certificates UL Certificate
	Certificates ENEC10_VDE Certificate
	Certificates ENEC+_VDE Certificate
	Certificates CB TEST CERTIFICATE DE1-57844
	Declarations of conformity EU Declaration of conformity
	Declarations of conformity Manufacturer declaration
	Eulumdat 727165_LF2000-G3-820-04_LDT
	IES data 727164_LF2000-G3-820-04_IES
	Eulumdat 727167_LF2000-G3-824-04_LDT
	IES data 727166_LF2000-G3-824-04_IES
	Eulumdat 727169_LF2000-G3-827-04_LDT
	IES data 727168_LF2000-G3-827-04_IES
	Eulumdat 727171_LF2000-G3-830-04_LDT
	IES data 727170_LF2000-G3-830-04_IES
	Eulumdat 727173_LF2000-G3-840-04_LDT

Product family datasheet

	IES data 727172_LF2000-G3-840-04_IES
	Eulumdat 727175_LF2000-G3-850-04_LDT
	IES data 727174_LF2000-G3-850-04_IES
	Eulumdat 727177_LF2000-G3-865-04_LDT
	IES data 727176_LF2000-G3-865-04_IES
	Eulumdat 727179_LF2000-G3-927-04_LDT
	IES data 727178_LF2000-G3-927-04_IES
	Eulumdat 727181_LF2000-G3-930-04_LDT
	IES data 727180_LF2000-G3-930-04_IES
	Eulumdat 727183_LF2000-G3-940-04_LDT
	IES data 727182_LF2000-G3-940-04_IES
	Eulumdat 727185_LF2000-G3-SW30-04_LDT
	IES data 727184_LF2000-G3-SW30-04_IES
	Eulumdat 727187_LF2000-G3-SW40-04_LDT
	IES data 727186_LF2000-G3-SW40-04_IES

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899952980	LF2000 -G3-820-04	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1397.00 g
4052899952997	LF2000 -G3-824-04	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1397.00 g
4052899953000	LF2000 -G3-827-04	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1397.00 g
4052899953017	LF2000 -G3-830-04	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1397.00 g
4052899953024	LF2000 -G3-840-04	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1397.00 g

Product family datasheet

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899953031	LF2000 -G3-850-04	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1637.00 g
4052899953048	LF2000 -G3-865-04	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1397.00 g
4052899963993	LF2000 -G3-927-04	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1397.00 g
4052899964006	LF2000 -G3-930-04	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1397.00 g
4052899964013	LF2000 -G3-940-04	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1397.00 g
4052899964020	LF2000 -G3-SW30-04	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1397.00 g
4052899964037	LF2000 -G3-SW40-04	Shipping carton box 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1397.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Accessories Optional

Product description	Accessory name	Accessory code
LF2000 -G3-820-04	FX -SC08-G2-CT2PF-0500	▶ 4052899464735
LF2000 -G3-820-04	FX -SC08-G2-CT2PF-1000	▶ 4052899464766
LF2000 -G3-820-04	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF2000 -G3-824-04	FX -SC08-G2-CT2PF-0500	▶ 4052899464735
LF2000 -G3-824-04	FX -SC08-G2-CT2PF-1000	▶ 4052899464766
LF2000 -G3-824-04	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF2000 -G3-827-04	FX -SC08-G2-CT2PF-0500	▶ 4052899464735
LF2000 -G3-827-04	FX -SC08-G2-CT2PF-1000	▶ 4052899464766
LF2000 -G3-827-04	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF2000 -G3-830-04	FX -SC08-G2-CT2PF-0500	▶ 4052899464735
LF2000 -G3-830-04	FX -SC08-G2-CT2PF-1000	▶ 4052899464766
LF2000 -G3-830-04	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF2000 -G3-840-04	FX -SC08-G2-CT2PF-0500	▶ 4052899464735
LF2000 -G3-840-04	FX -SC08-G2-CT2PF-1000	▶ 4052899464766
LF2000 -G3-840-04	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF2000 -G3-850-04	FX -SC08-G2-CT2PF-0500	▶ 4052899464735
LF2000 -G3-850-04	FX -SC08-G2-CT2PF-1000	▶ 4052899464766
LF2000 -G3-850-04	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF2000 -G3-865-04	FX -SC08-G2-CT2PF-0500	▶ 4052899464735

Product family datasheet

LF2000 -G3-865-04	FX -SC08-G2-CT2PF-1000	4052899464766
LF2000 -G3-865-04	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF2000 -G3-927-04	FX -SC08-G2-CT2PF-0500	▶ 4052899464735
LF2000 -G3-927-04	FX -SC08-G2-CT2PF-1000	▶ 4052899464766
LF2000 -G3-927-04	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF2000 -G3-930-04	FX -SC08-G2-CT2PF-0500	▶ 4052899464735
LF2000 -G3-930-04	FX -SC08-G2-CT2PF-1000	▶ 4052899464766
LF2000 -G3-930-04	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF2000 -G3-940-04	FX -SC08-G2-CT2PF-0500	▶ 4052899464735
LF2000 -G3-940-04	FX -SC08-G2-CT2PF-1000	▶ 4052899464766
LF2000 -G3-940-04	FX -SC08-G2-CT4PJ	▶ 4052899464858

References / Links

System configurator tool is available online at <https://flex.osram.info/en/flex-configurator>

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.